


H
Spec Sheet
118651.pdf
118651BB.pc
118652BB.pc
118653BB.pc
10:54 AM
3/20/2015

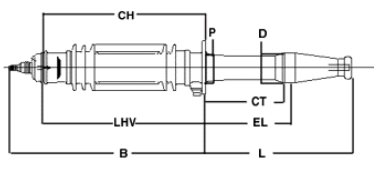

Original Bushing Information

Original Bushing Manufacturer: G.E. **Mounting Position:** Vertical
Catalog Number: 11B657BB
Voltage Class (kV): 230 **BIL (kV):** 750

Application	DrawLead	Bottom Connected	Oil Circuit Breaker
Current Rating (Amps)		2000	
230W2000UJ (Amps)		2000	

General Comments:

Replacement Information

ABB Style Number: 230W2000UJ **Alternate ABB Style Number:**

Review dimensional differences verifying critical dimensions to meet application requirements.

Notes/Comments:

Catalog Number	BIL	EL	CT	L	B	D	Bolt Circle	No. Of Holes	Hole Dia. (inches)	Creep
11B657BB	750kV	23 in.	23 in.	50.25 in.	88.44 in.	10.75 in.	15.75 in.	8	1.25 in.	173 in.
230W2000UJ	750kV	23 in.	23 in.	50.296 in.	89.172 in.	10.75 in.	15.75 in.	8	1.25 in.	178 in.

Catalog Number	Strike	P Dia.	Cable Height/Pin Height for AB Bushing - CH	LHV	Top Terminal Threads (inches)	Bottom Terminal Thread/Configuration
11B657BB	64.625 in.	12.13 in.	N/A	78.31 in.	2.0-12 x 2.5	ansi/IEEE fig 3
230W2000UJ	64.609 in.	11.375 in.	N/A	71.219 in.	2.0-12UN-2A, 2.500 USABLE THD x	(4) .375-16UN-2B tapped holes on 3.75 B.C. (8) .500-12UN-2B tapped on 6.75 B.C.