


F H
 xType Spec Sheet
 Bushing
 Bushing 11B660.pdf
 Bushing 11B6608B.pc
 Bushing
 Bushing
 Bushing 11B671.pdf
 Bushing
 Bushing
 Bushing
 Bushing
 Bushing
 Bushing 11B680.pdf
 Bushing
 Bushing
 Bushing 11B686.pdf
 Bushing
 Bushing
 Bushing 11B6878B.pc
 Bushing
 Bushing
 Bushing 11B693.pdf
 Bushing
 Bushing
 Bushing

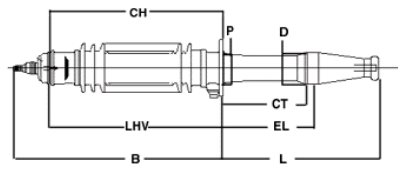

Original Bushing Information

Original Bushing Manufacturer: G.E. **Mounting Position:**
Catalog Number: 11B707
Voltage Class (kV): 196 **BIL (kV):** 900

Application	DrawLead	Bottom Connected	Oil Circuit Breaker
Current Rating (Amps)	800		
196X0800XA (Amps)	800		

General Comments:

Replacement Information

ABB Style Number: 196X0800XA **Alternate ABB Style Number:**

Review dimensional differences verifying critical dimensions to meet application requirements.

Notes/Comments:

Catalog Number	BIL	EL	CT	L	B	D	Bolt Circle	No. Of Holes	Hole Dia. (inches)	Creep
11B707	900kV	26.75 in.	26.75 in.	60 in.	89.56 in.	12.5 in.	21 in.	12	1.250 in.	N/A
196X0800XA	900kV	26.75 in.	26.75 in.	60.046 in.	91.422 in.	12 in.	21 in.	12	1.25 in.	178 in.

Catalog Number	Strike	P Dia.	Cable Height/Pin Height for AB Bushing - CH	LHV	Top Terminal Threads (inches)	Bottom Terminal Thread/Configuration
11B707	64.69 in.	N/A	76.81 in.	70.69 in.	1.5-12x2.12	ansi fig 3
196X0800XA	64.593 in.	16.875 in.	86.33 in.	70.593 in.	1.50-12x2.0, SP x	2.0 id tube N/A

Cable Adapter:

4861B60H01

Flange Adapter:

NONE